

Europäisches Patentamt

European Patent Office

Office européen des brevets  
Frist

19. Juni 2001



(11)

EP 1 104 799 A1

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
06.06.2001 Bulletin 2001/23

(51) Int Cl.7: C09K 11/79 ✓

DKL

(21) Application number: 99123747.0

(22) Date of filing: 30.11.1999

1999P05578EP

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Hintzen, H.T.,  
Lab. of Solid State & Materials Chem.  
5600 MB Eindhoven (NL)  
• van Krevel, J.W.H.,  
Lab. Solid State & Materials Chem.  
5600 MB Eindhoven (NL)  
• Botty, G., Ir. Océ Technologies B.V.  
5900 MA Venlo (NL)

(71) Applicant: Patent-Treuhand-Gesellschaft für  
elektrische Glühlampen mbH  
81543 München (DE)

(54) Red emitting luminescent material

(57) Red emitting luminescent material with a host  
lattice of the nitridosilicate type  $M_xSi_yN_z$ :Eu, wherein M

is at least one of an alkaline earth metal chosen from  
the group Ca, Sr, Ba and wherein  $z = 2/3x + 4/3y$ .

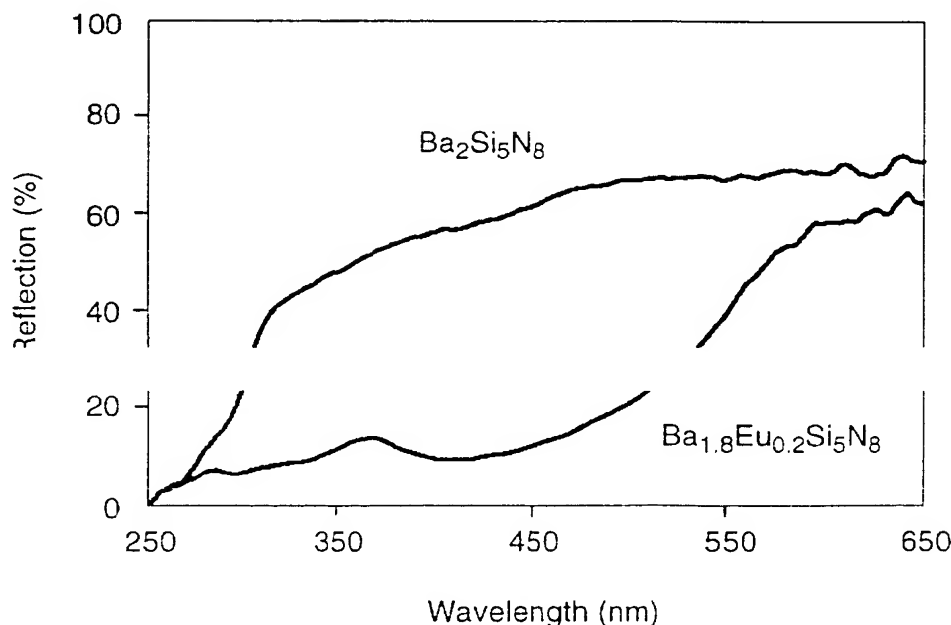


FIG. 1

## Description

## Technical Field

- 5 [0001] This invention relates to a Red Emitting Luminescent Material and more particularly, but not exclusively to a phosphor for light sources, especially for Light Emitting Devices (LED). The phosphor belongs to the class of rare-earth activated silicon oxynitrides.

## Background Art

- 10 [0002] For  $\text{Eu}^{2+}$ -doped material normally UV blue emission is observed (Blasse and Grabmeier: Luminescent Materials, Springer Verlag Heidelberg, 1994, in the following cited under D1). Several studies show that also emission in the green and yellow part of the visible spectrum is possible (Blasse: Special Cases of divalent lanthanide emission, Eur. J. Solid State Inorg. Chem. 33 (1996), p. 175; Poort, Blokpoel and Blasse: Luminescence of  $\text{Eu}^{2+}$  in Barium and Strontium Aluminate and Gallate, Chem. Mater. 7 (1995), p. 1547; Poort, Reijndoudt, van der Kuip, and Blasse: Luminescence of  $\text{Eu}^{2+}$  in Silicate host lattices with Alkaline earth ions in a row, J. Alloys and Comp. 241 (1996), p. 75). Hitherto, red  $\text{Eu}^{2+}$  luminescence is observed only in some exceptional cases, such as in alkaline earth sulphides and related lattices of the rock-salt type (Nakao, Luminescence centers of  $\text{MgS}$ ,  $\text{CaS}$  and  $\text{CaSe}$  Phosphors Activated with  $\text{Eu}^{2+}$  Ion, J. Phys. Soc. Jpn. 48(1980), p. 534), in alkaline earth thiogallates (Davalos, Garcia, Fouassier, and Hagenmuller, Luminescence of  $\text{Eu}^{2+}$  in Strontium and Barium Thiogallates, J. Solid. State Chem. 83 (1989), p. 316) and in some borates (Diaz and Keszler: Red, Green, and Blue  $\text{Eu}^{2+}$  luminescence in solid state Borates: a structure-property relationship, Mater. Res. Bull. 31 (1996), p. 147).  $\text{Eu}^{2+}$  luminescence in alkaline-earth silicon nitrides has hitherto only been reported for  $\text{MgSiN}_2:\text{Eu}$  (Gaido, Dubrovskii, and Zykov: Photoluminescence of  $\text{MgSiN}_2$  Activated by Europium, Izv. Akad. Nauk SSSR, Neorg. Mater. 10 (1974), p. 564; Dubrovskii, Zykov and Chernovets: Luminescence of rare earth Activated  $\text{MgSiN}_2$ , Izv. Akad. Nauk SSSR, Neorg. Mater. 17 (1981), p. 1421) and  $\text{Mg}_{1-x}\text{Zn}_x\text{SiN}_2:\text{Eu}$  (Lim, Lee, Chang: Photoluminescence Characterization of  $\text{Mg}_{1-x}\text{Zn}_x\text{SiN}_2:\text{Tb}$  for Thin Film Electroluminescent Devices Application, Inorganic and Organic Electroluminescence, Berlin, Wissenschaft und Technik Verlag, (1996), p. 363). For both  $\text{Eu}^{2+}$  luminescence in the green and green/blue part of the spectrum was found.

- 25 [0003] New host lattices of the nitridosilicate type are based on a three dimensional network of cross-linked  $\text{SiN}_4$  tetrahedra in which alkaline earth ions ( $\text{M} = \text{Ca}$ ,  $\text{Sr}$  and  $\text{Ba}$ ) are incorporated. Such lattices are for example  $\text{Ca}_2\text{Si}_5\text{N}_8$  (Schlieper and Schlick: Nitridosilicate I, Hochtemperatursynthese und Kristallstruktur von  $\text{Ca}_2\text{Si}_5\text{N}_8$ , Z. anorg. allg. Chem. 621, (1995), p. 1037),  $\text{Sr}_2\text{Si}_5\text{N}_8$  and  $\text{Ba}_2\text{Si}_5\text{N}_8$  (Schlieper, Millus and Schlick: Nitridosilicate II, Hochtemperatursynthesen und Kristallstrukturen von  $\text{Sr}_2\text{Si}_5\text{N}_8$  and  $\text{Ba}_2\text{Si}_5\text{N}_8$ , Z. anorg. allg. Chem. 621, (1995), p. 1380), and  $\text{BaSi}_7\text{N}_{10}$  (Huppertz and Schnick: Edge-Sharing  $\text{SiN}_4$  tetrahedra in the highly condensed Nitridosilicate  $\text{BaSi}_7\text{N}_{10}$ , Chem. Eur. J. 3 (1997), p. 249). The lattice types are mentioned in Table 1.

- 30 [0004] However, sulfide based phosphors (e.g. earth alkaline sulfides) are less desirable for lighting applications, especially for LED applications, because they interact with the encapsulating resin system, and partially suffer from hydrolytic attack. Red emitting  $\text{Eu}^{2+}$  activated borates show already concentration quenching to a certain degree at the operating Temperature of LEDs.

## Disclosure of the Invention

- 35 [0005] It is therefore, an object of this invention to obviate the disadvantages of the prior art. It is another object of together with high chemical and thermal stability.

- 40 [0006] Especially high stability up to at least 100 °C is highly desirable for LED applications. Their typical operation Temperature is around 80 °C.

- [0007] These objects are accomplished by the characterising features of claim 1. Advantageous embodiments can be found in the dependant claims.

- 50 [0008] The new  $\text{Eu}^{2+}$ -doped luminescent materials show special long wavelength red emission. These phosphors are based on alkaline-earth silicon nitride material as host-lattices. They are very promising for LED applications. Hitherto white LEDs were realised by combining a blue emitting diode with a yellow emitting phosphor. Such a combination has only a poor colour rendition. A far better performance can be achieved by using a red-green-blue system. However, up to now, no candidate for a red phosphor excitable by short wavelength radiation around 450 nm could be found. The new material is the first one. Typically it can be used together with a green-emitting phosphor, for example strontiumaluminate  $\text{SrAl}_2\text{O}_4:\text{Eu}^{2+}$ , whose emission maximum is around 520 nm.

- 55 [0009] In detail, the new Red Emitting Luminescent Material, uses a host lattice of the nitridosilicate type  $\text{M}_x\text{Si}_y\text{N}_z$ :Eu, wherein M is at least one of an alkaline earth metal chosen from the group Ca, Sr, Ba and wherein  $z = 2/3x + 4/3y$ .

The incorporation of nitrogen increases the proportion of covalent bond and ligand-field splitting. As a consequence this leads to a pronounced shift of excitation and emission bands to longer wavelengths in comparison to oxide lattices.

[0010] Preferably, the red emitting luminescent material is of the type, wherein  $x = 2$ , and  $y = 5$ .

[0011] In another preferred embodiment, the red emitting luminescent material is of the type, wherein  $x = 1$ , and  $y = 7$ .

5 [0012] Preferably, the metal M in the red emitting luminescent material is strontium because the resulting phosphor is emitting at relatively short wavelengths. Thus the efficiency is rather high in comparison to most of the other metals.

[0013] In a further embodiment the red emitting luminescent material uses a mixture of different metals, for example Ca (10 atom-%) together with Ba (balance), as component M.

10 [0014] These luminescent materials show high absorption and good excitation in the UV and blue visible spectrum (up to more than 450 nm), high quantum efficiency and low temperature quenching up to 100 °C.

[0015] It can be used for luminescence conversion LEDs with a blue light emitting primary source together with one or more phosphors (red and possibly additionally green).

#### Brief Description of the Drawings

15

[0016]

Fig. 1: Diffuse reflection spectra of undoped  $\text{Ba}_2\text{Si}_5\text{N}_8$  and  $\text{Ba}_2\text{Si}_5\text{N}_8:\text{Eu}$ ;

20

Fig. 2: Diffuse reflection spectra of undoped  $\text{BaSi}_7\text{N}_{10}$  and  $\text{BaSi}_7\text{N}_{10}:\text{Eu}$ ;

Fig. 3: Emission spectrum of  $\text{Ba}_2\text{Si}_5\text{N}_8:\text{Eu}$ ;

Fig. 4: Emission spectrum of  $\text{BaSi}_7\text{N}_{10}:\text{Eu}$ ;

25

Fig. 5: Emission spectrum of  $\text{Sr}_2\text{Si}_5\text{N}_8:\text{Eu}$ .

#### Detailed Embodiments

30 [0017]  $\text{Eu}_2\text{O}_3$  (with purity 99,99 %), or Eu metal (99,99 %), Ba metal (> 99 %), Sr metal (99 %),  $\text{Ca}_3\text{N}_2$  (98 %), or Ca powder (99,5%) and  $\text{Si}_3\text{N}_4$  (99,9 %) were used as commercially available starting materials. Ba and Sr were nitrided by firing at 550 and 800 °C under a nitrogen atmosphere. Subsequently,  $\text{Ca}_3\text{N}_2$  or nitrided Ba, Ca or Sr were ground in a mortar and stoichiometrically mixed with  $\text{Si}_3\text{N}_4$  under nitrogen atmosphere. The Eu-concentration was 10 atom-% compared to the alkaline earth ion. The powdered mixture was fired in molybdenum crucibles at about 1300-1400 °C in a horizontal tube furnace under nitrogen/hydrogen atmosphere. After firing, the powders were characterised by powder X-ray diffraction (Cu,  $K\alpha$ -line), which showed that all compounds had formed.

35 [0018] The undoped  $\text{Ba}_2\text{Si}_5\text{N}_8$ ,  $\text{Ca}_2\text{Si}_5\text{N}_8$  and  $\text{BaSi}_7\text{N}_{10}$  are greyish-white powders. As expected, the undoped rare-earth activated silicon oxynitrides show high reflection in the visible range (400-650 nm) and a strong drop in the reflection between 250-300 nm (Fig. 1 and 2). The absorption is ascribed to host-lattice excitation. The Eu-doped samples are orange-red, except for  $\text{BaSi}_7\text{N}_{10}:\text{Eu}$  which is orange-yellow (Table 1). The strong coloration is unique for Eu<sup>2+</sup>-doped rare-earth activated silicon oxynitrides and make these material interesting orange-red pigments. A typical example of a reflection spectrum of  $\text{Ba}_2\text{Si}_5\text{N}_8:\text{Eu}$  shows that the absorption due to Eu is superposed on the host-lattice

reflection spectra were observed for  $\text{Ba}_2\text{Si}_5\text{N}_8:\text{Eu}$  and  $\text{Ca}_2\text{Si}_5\text{N}_8:\text{Eu}$ .

45 [0019] For  $\text{BaSi}_7\text{N}_{10}:\text{Eu}$  the absorption of Eu is less far in the visible part (Fig. 2), which explains the orange-yellow colour of this compound.

[0020] All samples show efficient luminescence under UV excitation with emission maxima in the red part of the visible spectrum (see Table 1). Two typical examples of emission spectra can be seen in Figs. 3 and 4. They show that: the emission is at extremely long wavelengths (for Eu<sup>2+</sup> emission) with maxima up to 660 nm for  $\text{BaSi}_7\text{N}_{10}:\text{Eu}$  (Fig. 4.). Excitation bands are observed at low energy which is the result of a centre of gravity of the Eu<sup>2+</sup> 5d band at low energy and a strong ligand-field splitting of the Eu<sup>2+</sup> 5d band, as can be expected for N<sup>3-</sup> containing lattices (van Krevel, Hintzen, Metselaar, and Meijerink: Long Wavelength Ce<sup>3+</sup>-luminescence in Y-Si-O-N Materials, J. Alloys and Comp. 168 (1998) 272).

50 [0021] Since these materials can convert blue into red light due to low-energy excitation bands, they can be applied in white light sources, for example based on primarily blue-emitting LED's (typically GaN or InGaN) combined with red, yellow and/or green emitting phosphors.

Table 1:

Compound	Crystal structure	Colour	Emission Maximum (nm)
Ba <sub>2</sub> Si <sub>5</sub> N <sub>8</sub> :Eu	Monoclinic	Orange-Red	620
Sr <sub>2</sub> Si <sub>5</sub> N <sub>8</sub> :Eu	Orthorhombic	Orange-Red	625
Ba <sub>2</sub> Si <sub>5</sub> N <sub>8</sub> :Eu	Orthorhombic	Orange-Red	640
BaSi <sub>7</sub> N <sub>10</sub> :Eu	Monoclinic	Orange-Yellow	660

[0022] These emission maxima are unusually far in the long wavelength side. A specific example is a phosphor of the type Sr<sub>1.8</sub>Eu<sub>0.2</sub>Si<sub>5</sub>N<sub>8</sub>. its emission spectrum is shown in fig. 5.

[0023] Another embodiment for realising M is using Zn that can replace Ba, Sr or Ca fully or partially.

[0024] A further embodiment for replacing Si fully or partially is Ge. An concrete embodiment is Sr<sub>1.8</sub>Eu<sub>0.2</sub>Ge<sub>5</sub>N<sub>8</sub>.

### Claims

1. Red Emitting Luminescent Material, characterised in a host lattice of the nitridosilicate type M<sub>x</sub>Si<sub>y</sub>N<sub>z</sub>:Eu, wherein M is at least one of an alkaline earth metal chosen from the group Ca, Sr, Ba, Zn and wherein  $z = 2/3x + 4/3y$ .
2. Red emitting luminescent material according to claim 1, wherein  $x = 2$ , and  $y = 5$ .
3. Red emitting luminescent material according to claim 1, wherein  $x = 1$ , and  $y = 7$ .
4. Red emitting luminescent material according to claim 1, wherein M is strontium.
5. Red emitting luminescent material according to claim 1, wherein M is a mixture of different metals.
6. Red emitting luminescent material according to claim 1, wherein Si is replaced fully or partially by Ge.
7. Light source with a red emitting luminescent material according to one of the precedent claims.
8. Light source of claim 6 wherein the primary emitted light is blue and the red emitting luminescent material is combined with a green emitting phosphor in order to secondary emitting white light.

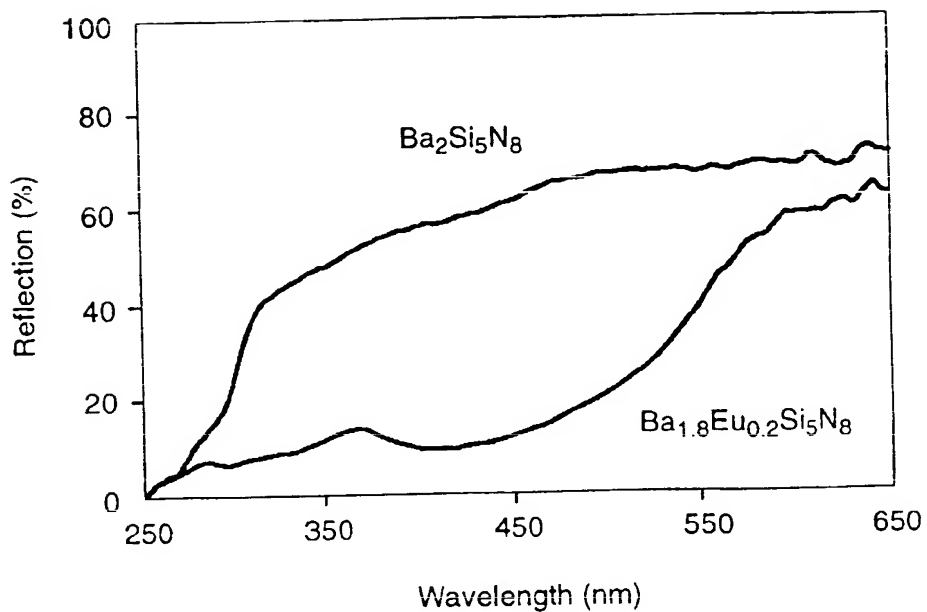


FIG. 1

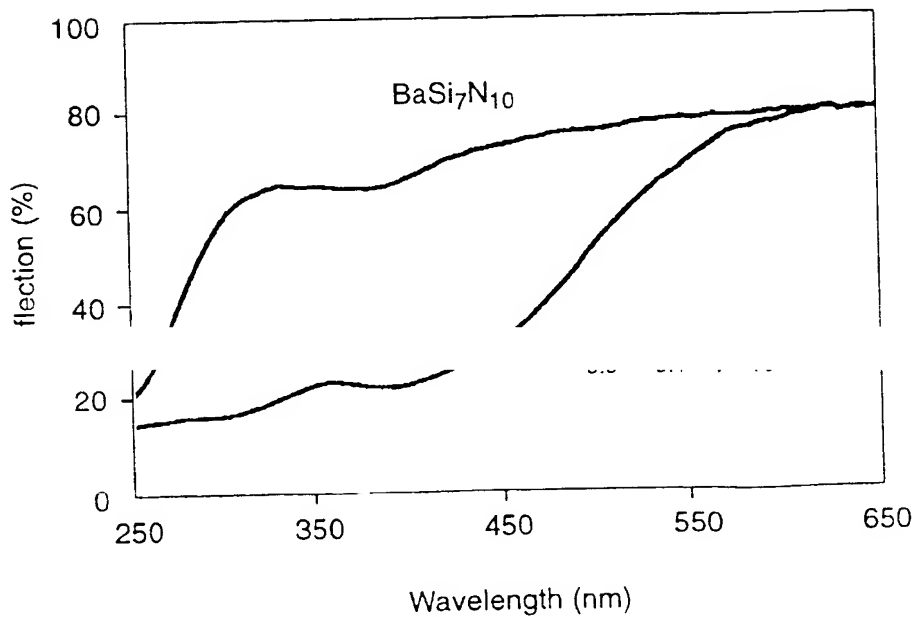


FIG. 2

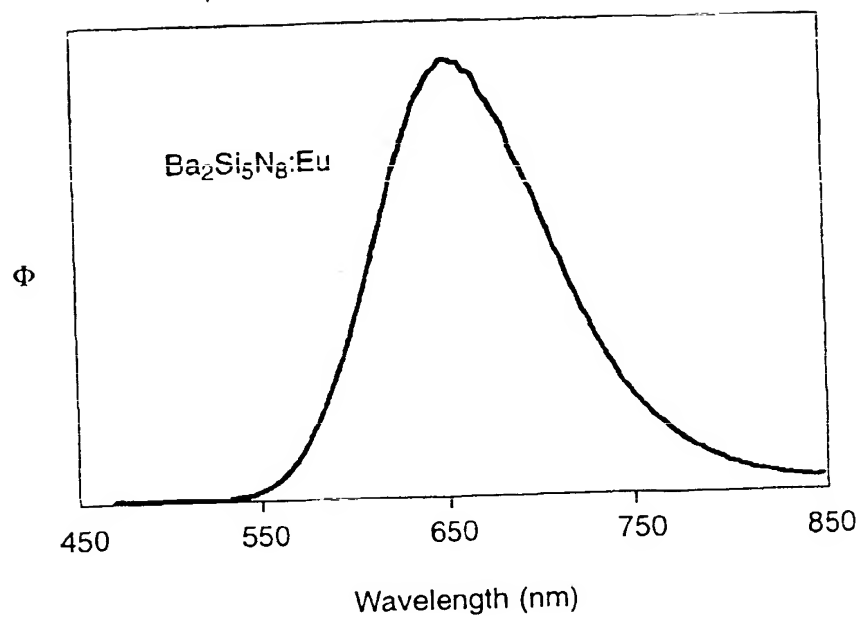


FIG. 3

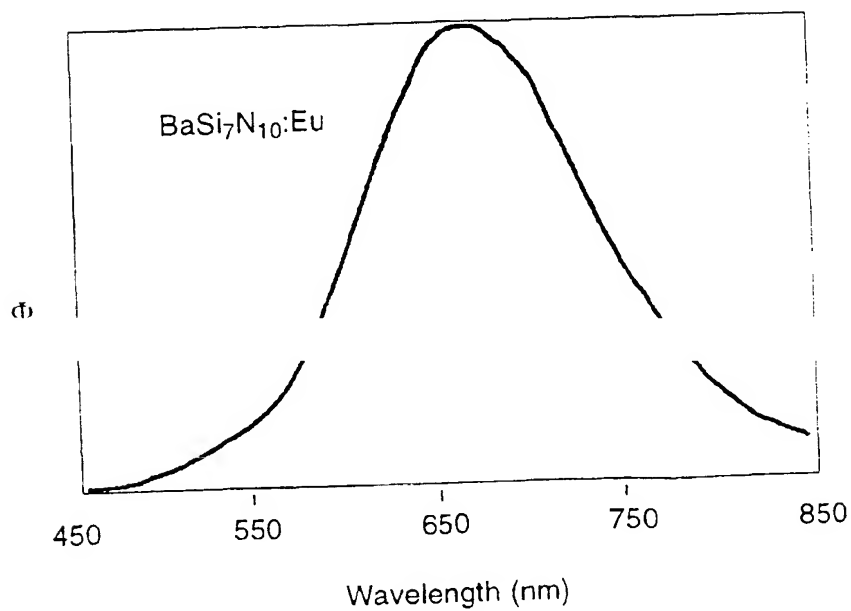


FIG. 4

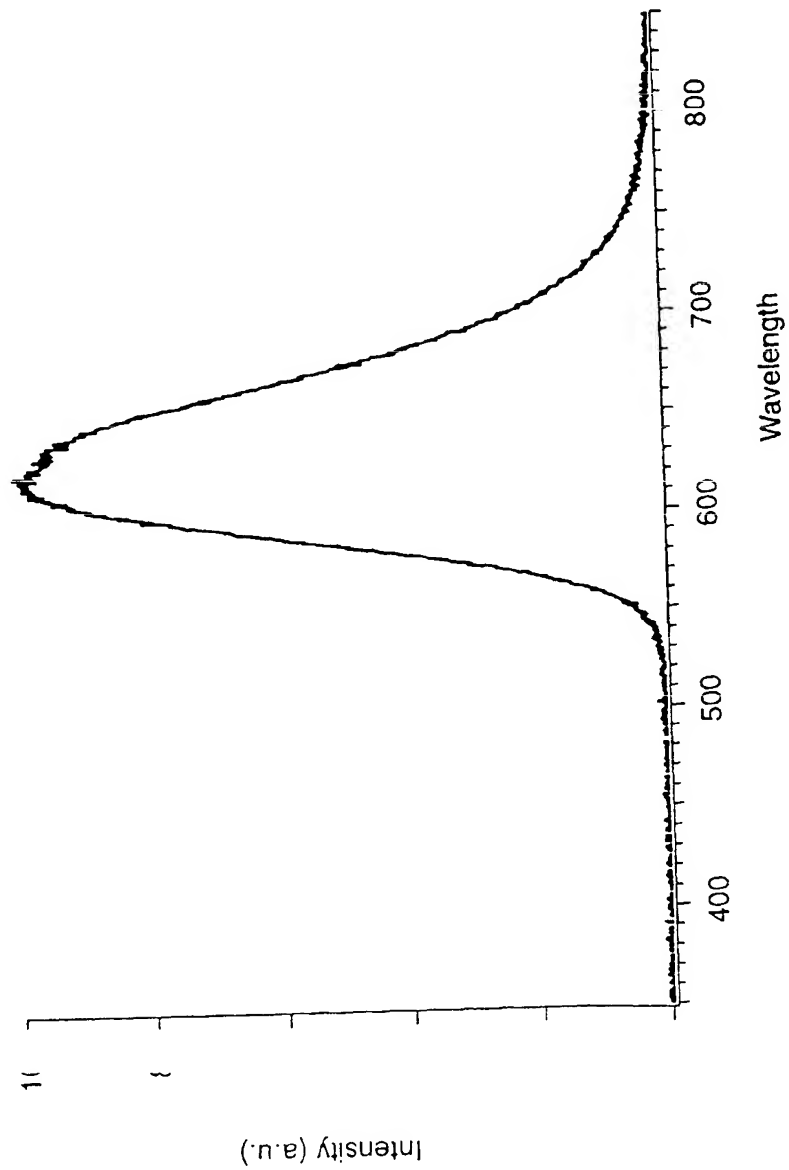


FIG. 5



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 12 3747

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	SOON-SEOK LEE ET AL: "Development and luminescent characteristics of CaSiN/sub 2/ based phosphors" JOURNAL OF THE INSTITUTE OF ELECTRONICS ENGINEERS OF KOREA D, OCT. 1999, INST. ELECTRON. ENG. KOREA, SOUTH KOREA, vol. 36-D, no. 10, pages 31-36, XP002136109 ISSN: 1226-5845	1-8	C09K11/79
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			C09K
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		19 April 2000	Drouot, M-C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EP FORM 1508 03/02 (PUBO1)